

AFL106

verve
design

FLOOR LAMP

Thank-you for purchasing the New York Floor Lamp. This lamp has been designed and styled to suit the modern-day décor.


This lamp must be assembled before use. The following simple steps show how to correctly assemble this floor lamp.

Base & Shaft Assembly


1. Remove parts A, B, C, D, G.
All of these parts are connected together via the mains cord.
2. Remove the protective plastic sleeving which covers parts B, C & D.
3. Remove also the split plastic protectors from the ends of the stem sections B, C & D.
4. Assemble stem section B onto the base A by screwing the bottom of B onto the threaded spigot in the base. Withdraw the mains cord through the base A and the cord entry bushing K to simplify the assembly of A & B.
5. Repeat the assembly of C onto B and D onto C at each step withdraw the excess length of the mains cord through the base A.

Shade Assembly

1. Remove the retaining ring F from the lamp holder housing G, place the lamp shade E over the threaded section of the lamp holder and replace the retaining ring which will secure the lamp shade.
2. When a bulb (not supplied) has been inserted into the lamp holder the lamp assembly is complete, and the lamp is ready for use. The lamp uses a bulb with an E27 screw-in lamp cap, maximum rating is 60 watts.

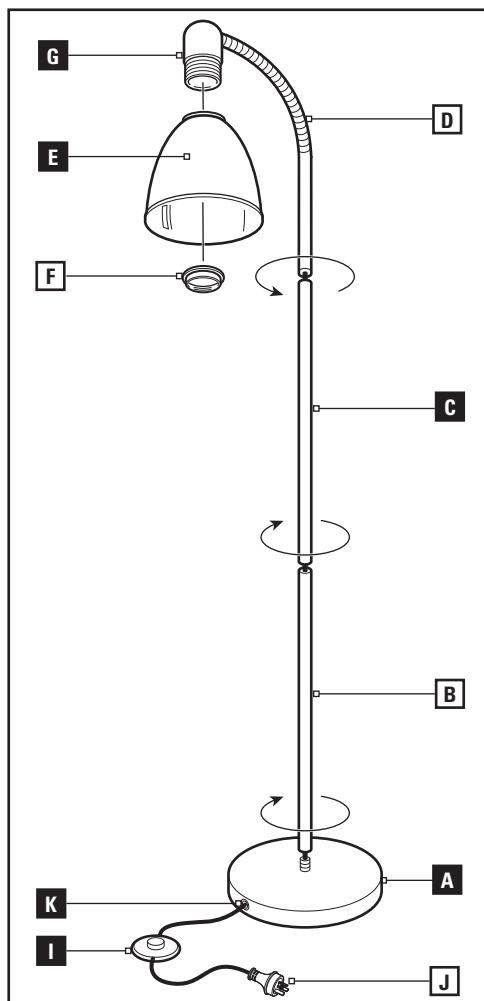

| | | | |
|----------|-------------|----------|---------------------|
| A | Base | F | Retaining Ring |
| B | Bottom Stem | G | Lamp Holder Housing |
| C | Middle Stem | I | Foot Switch |
| D | Head Stem | J | Mains Plug |
| E | Shade | K | Cord Entry Bushing |

 0.3m A minimum distance of 0.3m must be maintained between the lamp head and any illuminated object.

CPIN002860

NEW YORK

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE FIRST USE.