SATURN

27cm Brushed Chrome Round Ceiling Light

ACL014

INSTALLATION INSTRUCTIONS

INTRODUCTION

The Arlec ACL014 diffused ceiling lamp is for permanent indoor use. It has a metal base with acrylic diffuser and controls one T5 circular fluorescent tube, 22W.



USES ENERGY SAVING T5, 22W FLUORESCENT TUBE

INSTALLATION INFORMATION

Warning: It is illegal for persons other than licensed electrician or persons authorised by legislation, to work on the fixed wiring of any electrical installation.

- IMPORTANT: Ensure that ALL electrical connections are tight with no loose strands, including factory made connections.
- It's the installer's opportunity to consider the fire risk and take appropriate precautions.
- Input voltage – 240V 50Hz AC.
- Check product label for fluorescent tube type and maximum wattage (T5 circular fluorescent 22W).
- The luminaire must not, under any circumstances, be covered with any insulation materials or be installed close to flammable materials.
- Take off all the foam packaging materials placed under the three clips attached to the fluorescent tube before installation.
- Ensure electricity is switched off at the mains before commencing installation or maintenance.
- Suitable for mounting on normally flammable surfaces.

INSTALLATION INSTRUCTIONS

- Select the required position for the luminaire and provide a suitable power supply to that point.
- Remove the diffuser from the metal base by turning the diffuser anti-clockwise in order to unhook the metal base pins from the diffuser slots. In addition, take off all the foam packaging materials placed under the three clips attached to the fluorescent tube before installation.
- Double check all connections and ensure all terminal block screws are tight. Make sure that there are no exposed conductors, loose strands or any trapped insulation. Place terminal block in position on the lamp holder base insulator and ensure that the rubber seal is in place on the front of the mounting base.
- Fix the base to the wall or ceiling as required. Beware of joints, water pipes and electric cables when applying the fixing screws

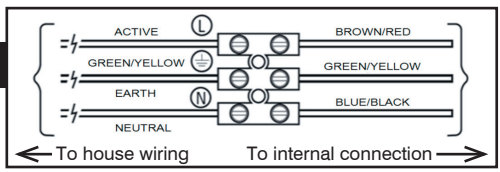

- The terminal block wired to the rear of the light must be wired to the switched active, neutral and earth of the lighting circuit to which it is being connected. Connect in accordance with Fig.2. (NOTE: These luminaires must be earthed.)
- Fit the fluorescent tube and attach it to the metal base by means of three clips and three captive screws. Ensure that correctly rated fluorescent tube is fitted (See product label for correct maximum lamp wattage).
- Refit the diffuser by hooking the metal base pins into the diffuser slots and turn the diffuser clockwise. Then, switch the power supply and test the luminaire.

IMPORTANT! PLEASE READ THESE INSTRUCTIONS CAREFULLY.

USER INFORMATION

- Always switch off mains supply before servicing, fitting and moving position of the luminaire or changing the lamp.
- Replace failed fluorescent tube immediately. Allow the fluorescent tube and fitting to cool down before replacing the fluorescent tube. Then, you can pull the diffuser straight off from the metal base pins by turning the diffuser anti-clockwise.
  Remove the fluorescent tube from the lamp by unclipping the three clips supporting the fluorescent tube.
- Check that the correct fluorescent tube type and wattage is fitted. See product label for correct maximum fluorescent tube wattage (T5 circular fluorescent 22W)

MAINTENANCE

- To avoid dust build up, wipe lightly with a damp cloth as required
- Care should be taken when cleaning to prevent scratching. A soft cloth or fine-hair brush should be used together with a non-abrasive cleaner.
- Do not use solvents or abrasive cleaners on any part of your light.

WARRANTY

Arlec guarantees this product in accordance with the Australian Consumer Law.

Arlec also warrants to the original first purchaser of this product ("you") from a retailer that this product will be free of defects in materials and workmanship for a period of 12 months from the date of purchase; provided the product is not used or installed other than for the purpose, or in a manner not within the scope of the recommendations and limitations, specified by Arlec, is new and not damaged at the time of purchase, has been properly installed by a licensed electrician or contractor who is licensed to install electrical products in the place in which the product was installed and in accordance with Arlec's installation instructions, has been maintained in accordance with the recommendations specified by Arlec, has not been subjected to abuse, misuse, neglect or damage, has not been modified or repaired without the approval of Arlec and has not been used for, or installed in premises which are used for, commercial purposes ("Warranty").

If you wish to claim on the Warranty, you must, at your own expense, return the product or that part of the product which you believe is defective in materials and workmanship, and provide proof of original purchase, your name, address and telephone number and a certificate of installation or other document required by law for the installation of electrical products in the place in which the product was installed issued by the licensed electrician or contractor who installed the product, to Arlec at the address below within 12 months from the date of purchase. Please note that the Warranty does not cover removal or re-installation of the product or that part of the product which you believe is defective.

Arlec will assess any claim you may make on the Warranty in the above manner and if, in Arlec's reasonable opinion, the Warranty applies, Arlec will at its own option and expense replace the product (or part of the product) with the same or similar product (or part of the product) or repair the product (or part of the product) and return it to you or refund the price you paid for the product. Arlec will bear its own expenses of doing those things, and you must bear any other expenses of claiming on the Warranty.

The Warranty is in addition to other rights and remedies you may have under a law in relation to the product to which the Warranty relates.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

ARLEC

Arlec Australia Pty. Ltd. ACN 009 322 105
("Arlec") gives the Warranty.
Arlec's telephone number, address
and email address are:
Customer Service: (03) 9982 5111

Building 3, 31 – 41 Joseph Street,
Blackburn North, Victoria, 3130
Blackburn North LPO, P.O. Box 1065,
Blackburn North, 3130
Email: custservice@arlec.com.au

CPIN002441