

WARRANTY

Arlec guarantees this product in accordance with the Australian Consumer Law.

Arlec also warrants to the original first purchaser of this product ("you") from a retailer that this product will be free of defects in materials and workmanship for a period of 12 months from the date of purchase; provided the product is not used other than for the purpose, or in a manner not within the scope of the recommendations and limitations, specified by Arlec, is new and not damaged at the time of purchase, has not been subjected to abuse, misuse, neglect or damage, has not been modified or repaired without the approval of Arlec and has not been used for commercial purposes ("Warranty").

If you wish to claim on the Warranty, you must, at your own expense, return the product, and provide proof of original purchase and your name, address and telephone number, to Arlec at the address below or the retailer from whom you originally purchased the product within 12 months from the date of purchase.

Arlec will (or authorise the retailer to) assess any claim you may make on the Warranty in the above manner and if, in Arlec's reasonable opinion, the Warranty applies, Arlec will at its own option and expense (or authorise the retailer to) replace the product with the same or similar product or repair the product and return it to you or refund the price you paid for the product. Arlec will bear its own expenses of doing those things, and you must bear any other expenses of claiming on the Warranty.

The Warranty is in addition to other rights and remedies you may have under a law in relation to the product to which the Warranty relates.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law.

You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

ARLEC

Arlec Australia Pty. Ltd. ACN 009 322 105 ("Arlec") gives the Warranty.
Arlec's telephone number, address and email address are:

CUSTOMER SERVICE: (03) 9982 5111

Building 3, 31 – 41 Joseph Street, Blackburn North, Victoria, 3130
Blackburn North LPO, P.O. Box 1065, Blackburn North, 3130
Email: custservice@arlec.com.au

Installation Instructions

ARLEC

14

SLIM LINE BAR LIGHT



DIY

IMPORTANT!

Please read these instructions carefully.

Due to continuous research and development the specifications in here are subject to change without notice.


INSTALLATION

Decide on a suitable location to mount the light fitting. This product can be either wall mounted or fixed to the underside of a cabinet. Do not mount the fitting in a position where it may be subjected to excessive heat or steam e.g. above cooktop.

Brackets are to be attached to the mounting surface using screws provided. They must be secured firmly in position and be capable of permanently supporting the weight of the light fitting. The fitting can be mounted using either standard or right-angle brackets, as shown in Figure 1 and 2.


STANDARD MOUNTING

1. Attach single bracket to mounting surface using screw provided.
2. Slide light fitting completely over mounting bracket (until movement stops) see Figure 1.
3. Insert second mounting bracket into slot at other end of light fitting, then fasten in position with screw provided.
4. Slide light fitting back over second bracket to conceal mounting method

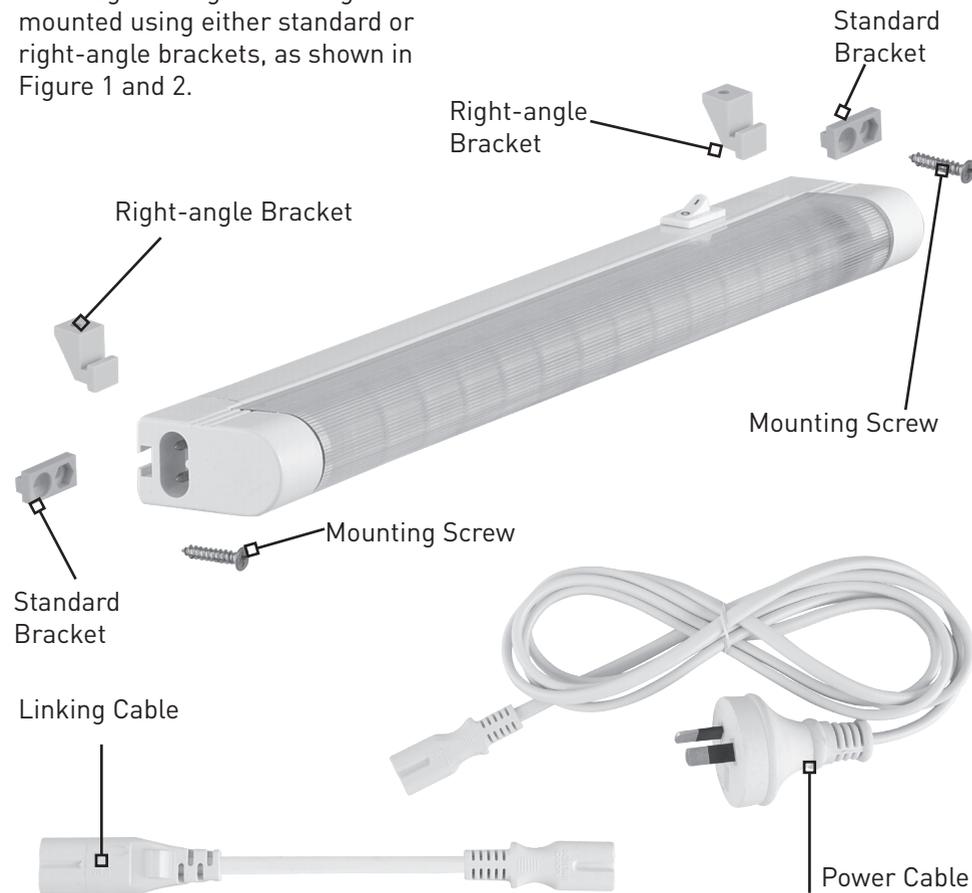

2

Figure 1. Standard Bracket Mounting

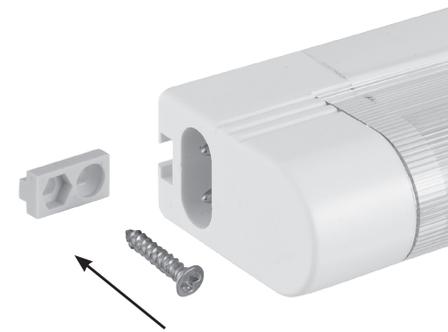

RIGHT-ANGLE MOUNTING

1. Slide brackets into slots at each end of light fitting base.
2. Fasten into position with screw provided see Figure 2.

SAFETY INFORMATION

- This product is designed for indoor use only.
- There are no user serviceable parts. Repairs, including replacement of supply flexible cord, must only be performed by a suitably qualified person.
- When linking lights together, do not exceed 250W maximum load. The appliance outlet cover must always remain in place when the outlet is not used.

CARE AND CLEANING



- Always switch off power before cleaning.
- Clean the exterior with a damp cloth, then wipe dry.
- Do not use abrasive cleansers or solvents.

Figure 2. Right-Angle Bracket Mounting



SPECIFICATIONS

Supply Voltage:	230-240V~
Frequency:	50Hz
Input:	3W (UC0074) 9W (UC0076)



CABINET MOUNTING



3