

# **ARLEC**

# Door & Window Protection Alarm AM612

## INSTALLATION & OPERATING INSTRUCTIONS



## INTRODUCTION

This is a wireless security alarm designed for the home, workshop or small business. It has been developed to be easy to set up and operate, giving both your family and yourself the security and peace of mind that you deserve. This system detects entry to your premises by using a Magnetic Window/Door Tamper Detector trigger that alarms when a window or door is opened.

## INSTALLATION

1. Open the AM612 Alarm and determine where it is to be located. The Window & Door Sensor is usually placed on front or rear doors but can also be used to secure windows.
2. Remove battery cover on the control panel and place 2 x AA alkaline batteries in the compartment. Replace cover.
3. Prepare the installation of the Control Panel by putting one screw (screw head less than 7mm dia.) in your desired location at a convenient height above the floor and 32.5mm from the edge of the door frame. Mount the Control Panel using the hang hole on the rear - the unit should be flush with the edge of the door frame - then secure the Control Panel from the front using the lower hole.
4. Install the reed switch using screws provided. Proper positioning of the Window/Door Sensor is important. Ensure that the wireless reed switch sensor and magnet are parallel and the arrows are pointing directly at one another. Separation between the pieces must not exceed 10mm or the unit will trigger (Fig\_01).

# PROGRAMMING

A security code should first be entered using the Control Panel keypad. This security number can be selected by you and is used to arm and disarm the unit. Enter your security code as follows: Enter the factory preset security code '111' then press '\*'. (A single beep will be heard and the green LED will flash). While the LED is flashing enter your own security code (up to four digits) then press '\* ' again. (A musical tune will be heard). To change your security code, repeat the above instructions but use your old security code instead of the factory preset number.

## Arm & Disarm

Arm the unit by simply entering your security code then press the '# ' button and a single long beep will be heard. The green LED will light for approximately 30 seconds (exit delay). Thirty seconds after you arm the system, the green LED will extinguish and the system will become fully armed.

When the door is opened and the secured area is entered, the Control Panel will beep once to indicate that you have 8 seconds in which to disarm the unit. To disarm, simply re-enter your security code and press the '# ' button. The unit will emit a double beep to indicate that it is now disarmed.

If the unit is not disarmed within the 8 seconds, the piezo siren will emit a loud sound to alert the occupants of the house to an intruder. To disarm the unit under these circumstances, simply re-enter your security code and then press the '# ' button.

## Panic Button

The panic button can be pressed at anytime. This will cause the unit to emit a siren sound and flash the green LED as if it has detected an intruder. WARNING - once pressed, the alarm will sound for 1 minute and shut off automatically unless turned off by entering the security code followed by the '# ' key.

# GUARANTEE

Arlec guarantees this product against defects of materials and workmanship for a period of 12 months from the date of purchase provided that the product is used in accordance with Arlec's recommendations and within such voltage and current limits as are specified by Arlec in relation to the product. Arlec will at its own option make good, replace with the same or similar product, or provide credit for any product manufactured or supplied by it, which proves to be defective within the limits set out above provided that no repairs, alterations or modifications to the product have been undertaken or attempted, other than by the company or its authorised agents. Should the purchaser wish to make a claim under the guarantee, the product should be returned pre-paid to the place of purchase. This guarantee is in addition to and does not take away from any rights available to the consumer under the Trade Practices Act and the State consumer protection legislation.

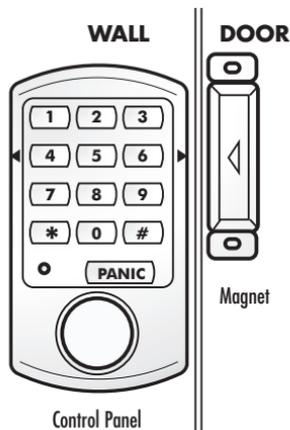


Fig.01

# SPECIFICATIONS

Entrance delay time	8 seconds
Exit delay time	30 seconds
Alarm sound reset time	1 minute
Intruder indication	Green LED will flash after resetting of alarm to indicate a burglar was detected.
Alarm output	approx. 110dB at 1 metre.

# ARLEC

## For all Sales enquiries

Phone (03) 9727 8860

Fax 1300 360 650

## Proof of Purchase

- Please retain your purchase receipt for all warranty claims.