CPIN002558

Installation Instructions

ARLEC

8 SLIM LINE BAR LIGHT

DIY

IMPORTANT!
Please read these instructions carefully.

Due to continuous research and development the specifications in here are subject to change without notice.
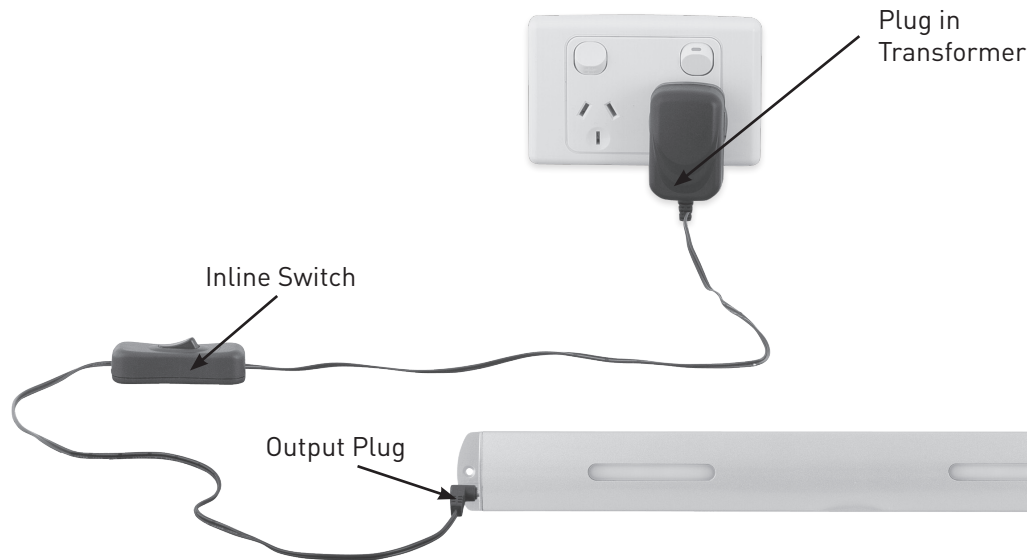
UC0098

INSTALLATION

A plug-in transformer is provided to operate these lights at SELV (Safety Extra Low Voltage). Ensure that there is a power outlet available to supply the transformer. This light fitting can be mounted in a variety of locations such as on a wall or fixed to the underside of a cabinet. Do not mount the fitting in a position where it may be subjected to excessive heat or steam e.g. above cooktop. A cord-line switch is provided to enable easy operation.

1. Fix the light fitting into position using the two screws supplied see Figure 1.

Figure 1.

OVERALL LAYOUT SHOWING ELECTRICAL CONNECTIONS
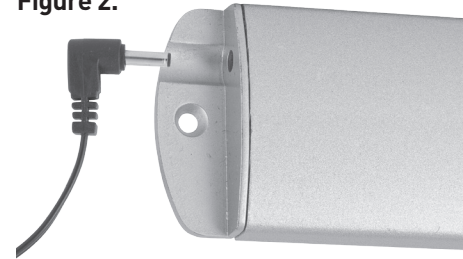

Plug in Transformer

Inline Switch

Output Plug

MAKING THE ELECTRICAL CONNECTIONS

2. When installation is complete connect the LED Bar Light to the plug-in transformer via the output plug and connecting socket within the side of the light fitting see Figure 2.

Figure 2.

3. Connect the plug-in transformer to the mains power outlet.

SAFETY INFORMATION

- This product is designed for indoor use only.

- There are no user serviceable parts. If the plug-in transformer is damaged or becomes inoperative, it must only be replaced by the same type of transformer (LED Driver) with the same electrical operating parameters.

CARE AND CLEANING

- Always switch off power before cleaning.

- Clean the exterior with a damp cloth, then wipe dry.

- Do not use abrasive cleansers or solvents.